



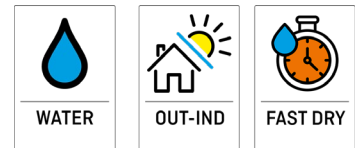

EXTREME

MAXIMUM PROTECTION IN OUTDOORS
With **EXTRA UV Protection**

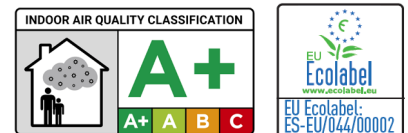

PRODUCT DESCRIPTION

Water-based single-component clear finish, specially formulated for finishing all types of interior and exterior woods. Non-flammable and virtually odourless.

GENERAL FEATURES

- Easy application with brush, short-haired roller, and spray gun.
- Excellent protection against atmospheric elements (weathering).
- Superb appearance, feel, smoothness, uniformity of texture, and silkiness.
- High elasticity and adhesion to wood (no cracking).
- Good scratch resistance.
- Utensil cleaning with water.



CHARACTERISTICS

Viscosity Brookfield 10 rpm	5000 cp
Specific weight	1,04 g/cm ³ .
Solids	29%
Appearance in the container	Fluid liquid.
Dry film appearance	Colourless.
pH	8-9
Stability without opening the container (protect from frosts)	12 months.
Varnish yield	8-10 m ² /l (1x90 g/m ²)

APPLICATION

Support and preparation: Applicable on all types of woods. However, for exterior applications, the use of woods with questionable durability should be avoided. The wood must be free of dust and dirt, and devoid of any varnish or paint layer to facilitate good penetration and adhesion of the product to the substrate. Do not apply on woods containing more than 15% moisture.

Application: The product is ready for use. Shake to ensure product uniformity. Apply 2-3 coats of 90 g/m² each, using any traditional method (brush, roller). To aid drying, avoid application in cold and humid environments. Maintain product temperature (20-25°C). For greater durability, apply a preliminary coat (80-120 g/m²) of Iruxil W-Color. If dilution is necessary, use water (preferably demineralized).

Maintenance: If signs of degradation appear over time, simply lightly sand the affected surface, and apply 1-2 coats of IRUXIL EXTREME.

Drying times: (100 g/m² at 20°C and 50% relative humidity)

Drying	1-2h
Sanding and Repainting	3-6h
Dry for stacking (1 Kg/cm ²)	8h

**The drying time is heavily influenced by the grammage, the type of substrate, and the environmental conditions during drying.*

PRESENTATION:



490 COLOURLESS

FINISH
GLOSSY
SATIN
MAT

OBSERVATIONS: Water-based finish known for its excellent adhesion, elasticity, and weather resistance.