

TECHNICAL DATA SHEET

Page 1 of 2



DECAPANTE GEL (REMOVER GEL)



PRODUCT DESCRIPTION


Wood remover in gel form that removes all types of paints and varnishes while preserving the wood being treated.

GENERAL FEATURES

- Quick action.
 - Non-dripping.
 - Thixotropic.
 - Easily applicable horizontally and vertically.
 - Doesn't darken or harm the wood.
- Less hazardous than traditional strippers based on chlorinated compounds or corrosive substances.**

CHARACTERISTICS

Brookfield Viscosity 10 rpm	2000 ± 1000 cps
Specific weight	1,06 g/cm ³ .
Appearance in the container	Gel.

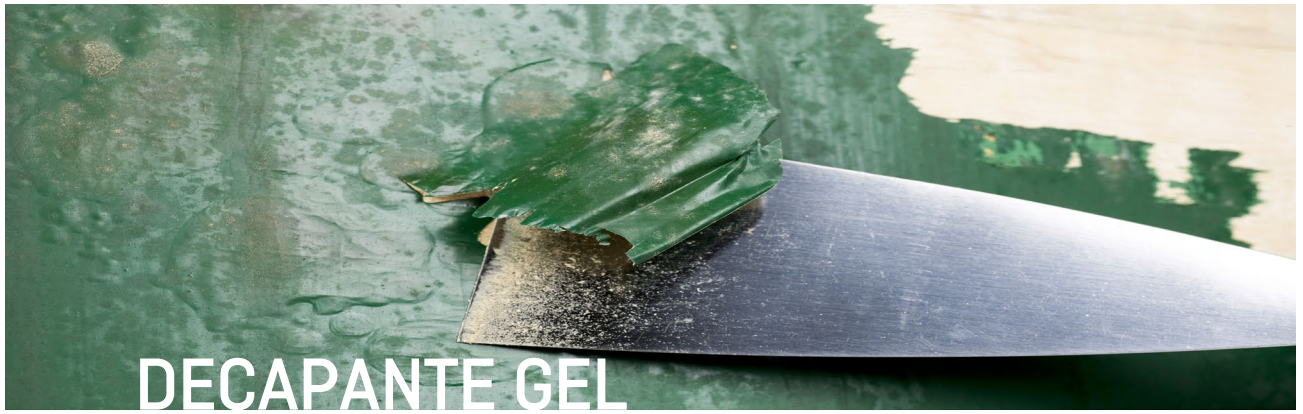

APPLICATION

Support and preparation: Suitable for cleaning all types of wood. For removing stains, paints, and varnishes in general.

Application:

- Apply DECAPANTE GEL generously with a brush onto the wood or surface intended for stripping.
- Wait 20-30 minutes. When the paint appears softened and wrinkled, remove the product with a spatula.
- Let it dry and use a brush or scraper to remove any remaining residue from the pores.

Tools cleaning: Use a solvent like acetone or similar. Do not pour residues down the drain.

OBSERVATIONS: Thoroughly homogenize the product before use. Observe the instructions on the Safety Data Sheet when using it.